

# Solid-state timer H3RN

CSM\_H3RN\_DS\_E\_4\_3

## Ultra-slim Timer for G2R Relay Socket

- Pin configuration compatible with G2R Relay and mounts to the P2R/P2RF Socket.
- Standard multiple time ranges and multiple operating modes.
- Conforms to EN61812-1 and IEC60664-1 4 kV/2 for Low Voltage, and EMC Directives.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

## Model Number Structure

### Model Number Legend

H3RN-□□  
1 2

#### 1. Output

- 1: SPDT
- 2: DPST-NO

#### 2. Time Range

- None: Short-time range (0.1 s to 10 min)
- 1: Long-time range (0.1 min to 10 hrs)

## Ordering Information

### List of Models

| Supply voltage        | Time-limit contact | Short-time range model<br>(0.1 s to 10 min) | Long-time range model<br>(0.1 min to 10 h) |
|-----------------------|--------------------|---|--|
| 24 VAC;<br>12, 24 VDC | SPDT               | H3RN-1                                      | H3RN-11                                    |
|                       | DPST-NO            | H3RN-2                                      | H3RN-21                                    |

**Note:** Specify both the model number and supply voltage when ordering.

Example: H3RN-1 24 VAC

Supply voltage

### Accessories (Order Separately)

#### Connecting Socket

| Timer      | Track mounting/Front connecting socket | Back connecting socket |
|------------|--|------------------------|
| H3RN-1/-11 | P2RFZ-05-E                             | P2R-057P               |
| H3RN-2/-21 | P2RFZ-08-E                             | P2R-087P               |

# Specifications

## ■ Ratings

| Item                               | H3RN-1/H3RN-2   | H3RN-11/H3RN-21   |
|------------------------------------|---|---|
| Time ranges                        | 0.1 s to 10 min (1 s, 10 s, 1 min, or 10 min max. selectable)   | 0.1 min to 10 h (1 min, 10 min, 1 h, or 10 hrs max. selectable) |
| Rated supply voltage (See note 2.) | 24 VAC (50/60 Hz); 12, 24 VDC   |   |
| Pin type                           | Plug-in   |   |
| Operating mode                     | ON-delay, interval, flicker OFF-start, or flicker-ON start selectable by DIP switch   |   |
| Operating voltage range            | 85% to 110% of rated supply voltage (12 VDC: 90% to 110% of rated supply voltage) (See note 1.)   |   |
| Reset voltage                      | 10% max. of rated supply voltage  |   |
| Power consumption                  | 24 VAC: Relay ON: approx. 0.8 VA<br>12 VDC: Relay ON: approx. 0.5 W<br>24 VDC: Relay ON: approx. 0.4 W  |   |
| Control outputs                    | 3 A at 250 VAC, resistive load ( $\cos\phi = 1$ ) (G6B-2□14P-FD-US used (Contact materials : AgSnIn))<br>The minimum applicable load is 10 mA at 5 VDC (P reference value). |   |

**Note:** 1. When using the H3RN in any place where the ambient temperature is more than 50°C, supply 90% to 110% of the rated voltages (12 VDC: 95% to 110% of the rated voltage).

2. Refer to *Safety Precautions for All Times* when combining the Timer with an AC 2-wire proximity sensor.


## ■ Characteristics

| Item                       | H3RN-1/H3RN-2  | H3RN-11/H3RN-21   |
|----------------------------|--|---|
| Accuracy of operating time | ±1% FS max. (1 s range: ±1%±10 ms max.)  |   |
| Setting error              | ±15%±50 ms FS max.   |   |
| Reset time                 | Min. power-opening time: 12, 24 VDC: 0.1 s max. (including halfway reset)<br>24 VAC: 0.5 s max. (including halfway reset)  |   |
| Influence of voltage       | ±2% FS max.  |   |
| Influence of temperature   | ±2% FS max.  |   |
| Insulation resistance      | 100 MΩ min. (at 500 VDC)   |   |
| Dielectric strength        | 2,000 VAC, 50/60 Hz for 1 min (between operating circuit and control output, or contacts of different poles)<br>1,000 VAC, 50/60 Hz for 1 min (between non-continuous contacts)  |   |
| Vibration resistance       | Destruction: 10 to 55 Hz, 0.75-mm single amplitude for 1 h each in 3 directions<br>Malfunction: 10 to 55 Hz, 0.5-mm single amplitude for 10 min each in 3 directions   |   |
| Shock resistance           | Destruction: 300 m/s <sup>2</sup><br>Malfunction: 100 m/s <sup>2</sup>   |   |
| Ambient temperature        | Operating: -10°C to 55°C (with no icing)<br>Storage: -25°C to 65°C (with no icing)   |   |
| Ambient humidity           | Operating: 35% to 85%  |   |
| Life expectancy            | Mechanical: 10,000,000 operations min. (under no load at 1,800 operations/h)<br>Electrical: 100,000 operations min. (3 A at 250 VAC, resistive load at 1,800 operations/h)   |   |
| Impulse withstand voltage  | Between power terminals: 1 kV  |   |
| Noise immunity             | ±1.5 kV, square-wave noise by noise simulator (pulse width: 100 ns/1 μs, 1-ns rise)  |   |
| Static immunity            | Destruction: 8 kV<br>Malfunction: 4 kV   |   |
| Degree of protection       | IP40 (Terminal screw sections are excluded.)   |   |
| Weight                     | Approx. 18 g   |   |
| EMC                        | (EMI)<br>Emission Enclosure:<br>Emission AC Mains:<br>(EMS)<br>Immunity ESD:<br>Immunity RF-interference:<br>Immunity Burst:<br>Immunity Surge:<br>Immunity Conducted Disturbance:<br>Immunity Voltage Dip/Interruption: | EN61812-1<br>EN55011 Group 1 class A<br>EN55011 Group 1 class A<br>EN61812-1<br>IEC61000-4-2<br>IEC61000-4-3<br>IEC61000-4-4<br>IEC51000-4-5<br>IEC61000-4-6<br>IEC61000-4-11 |
| Approved standards         | UL508, CSA C22.2 No. 14<br>Conforms to EN61812-1, IEC60664-1 4 kV/2.<br>Output category according to IEC60947-5-1.   |   |

# Connections


## ■ Connection

H3RN-1/H3RN-11




Bottom View

DIN Indication




H3RN-2/H3RN-21



Bottom View

DIN Indication





## Pulse Operation

A pulse output for a certain period can be obtained with a random external input signal.

Use the H3RN in interval mode as shown in the following timing charts.

H3RN-2/H3RN-21

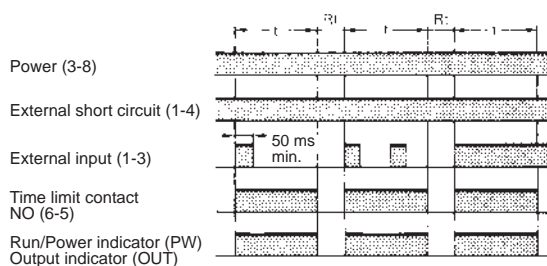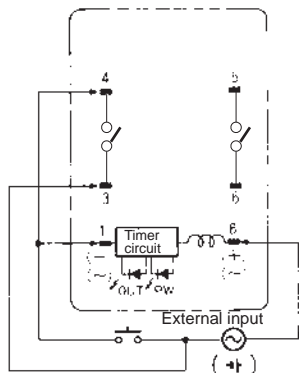

**Note:** t: Set time  
Rt: Reset time

**Caution**  
Be careful when connecting wires.

| Mode   | Terminals   |
|--|---|
| Pulse operation                              | Power supply between 3 and 8<br>Short-circuit between 4 and 1<br>Input signal between 3 and 1 |
| Operating mode; interval and all other modes | Power supply between 1 and 8  |

# Operation

## ■ Timing Chart

| Operating mode               | Timing chart   |                |
|------------------------------|----------------|----------------|
|                              | H3RN-1/H3RN-11 | H3RN-2/H3RN-21 |
| <b>ON-delay</b><br>          |                |                |
| <b>Interval</b><br>          |                |                |
| <b>Flicker OFF-start</b><br> |                |                |
| <b>Flicker ON-start</b><br>  |                |                |

**Note:** t: Set time  
 Rt: Reset time

## ■ DIP Switch Settings

The 1-s range and ON-delay mode for H3RN-1/-2, 1-min range and ON-delay mode for H3RN-11/-21 are factory-set before shipping.

### Time Ranges


| Model               | Time range | Time setting range | Setting | Factory-set |
|---------------------|------------|--------------------|---------|-------------|
| H3RN-1,<br>H3RN-2   | 1 s        | 0.1 to 1 s         |         | Yes         |
|                     | 10 s       | 1 to 10 s          |         | No          |
|                     | 1 min      | 0.1 to 1 min       |         | No          |
|                     | 10 min     | 1 to 10 min        |         | No          |
| H3RN-11,<br>H3RN-21 | 1 min      | 0.1 to 1 min       |         | Yes         |
|                     | 10 min     | 1 to 10 min        |         | No          |
|                     | 1 h        | 0.1 to 1 h         |         | No          |
|                     | 10 h       | 1 to 10 h          |         | No          |

**Note:** The left two DIP switch pins are used to select the time ranges.


### Operating Modes

| Operating mode    | Setting | Factory-set |
|-------------------|---------|-------------|
| ON-delay          |         | Yes         |
| Interval          |         | No          |
| Flicker OFF-start |         | No          |
| Flicker ON-start  |         | No          |

**Note:** The right two DIP switch pins are used to select the operating modes.

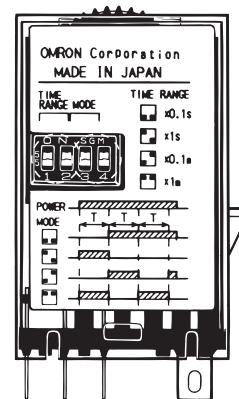

## Nomenclature


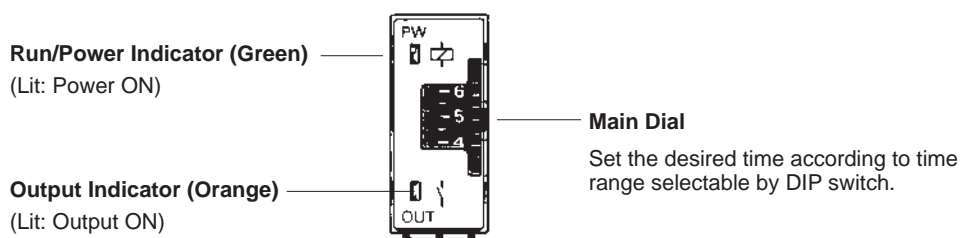


# Dimensions



Note: All units are in millimeters unless otherwise indicated.

## ■ Timers

### H3RN-1/H3RN-11 Front Mounting

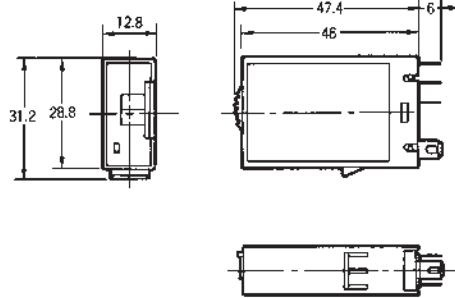

### H3RN-2/H3RN-21 Front Mounting

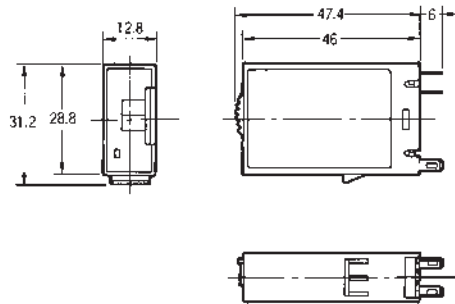


### Mounting Height

Use the P2RFZ-□-E or P2R-□7P to mount the H3RN. When ordering any one of these sockets, replace "□" with "05" for SPDT or "08" for DPST-NO. The P2RF-□ cannot be used because the hook is a different shape.


## ■ Connecting Socket

### Front connecting socket


#### P2RFZ-05-E

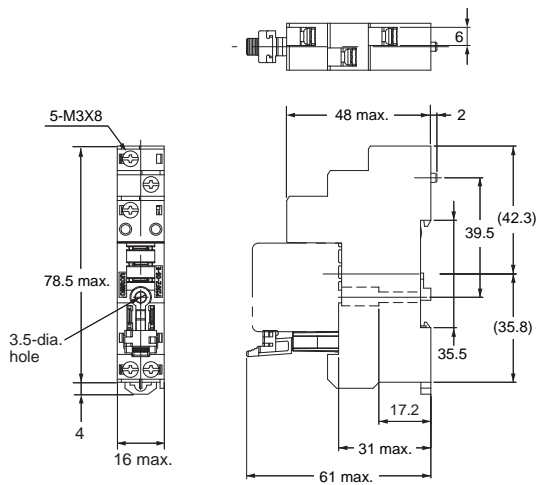



Terminal Arrangement/  
Internal Connection Diagram  
(Top View)




Mounting Hole  
Dimensions




## P2RFZ-08-E

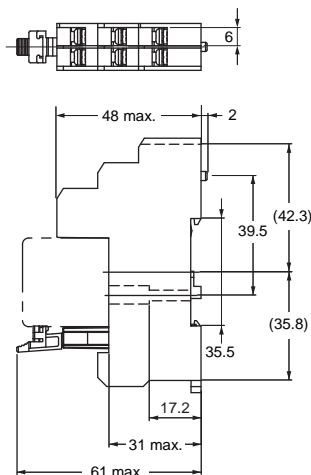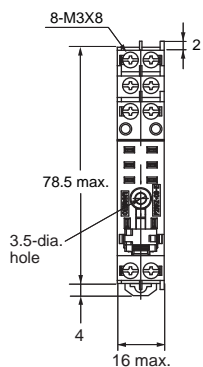

### Terminal Arrangement/ Internal Connection Diagram (Top View)






### Mounting Hole Dimensions



## Back connecting socket


### P2R-057P (1-pole)






### Terminal Arrangement (Bottom View)



### Mounting Holes




### P2R-087P (2-pole)




### Terminal Arrangement (Bottom View)




### Mounting Holes



## P2RFZ-□-E

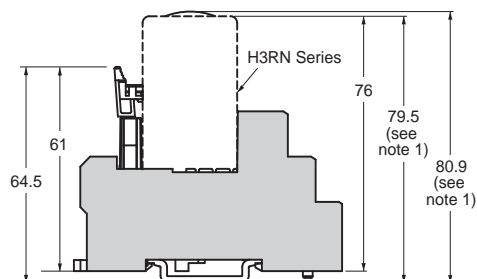


P2RFZ-05-E

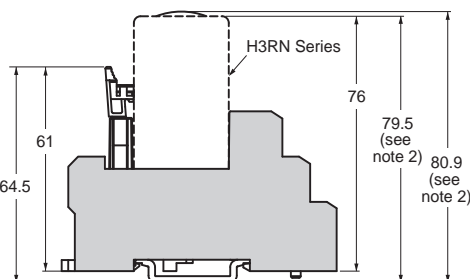

P2RFZ-08-E

## P2R-□7P

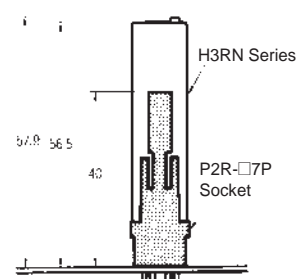

- Note:**
- The value shown indicates the dimension for the P2RFZ-05-E with the PFP-□N Mounting Rail. The value is 71.5 mm when using the PFP-N□2.
  - The value shown in parentheses indicates the dimension for the P2RFZ-08-E with the PFP-□N Mounting Rail. The value is 75.5 mm when using the PFP-N□2.


**Note:** There are no restrictions to the mounting direction.

## Safety Precautions

### Correct Use

When using the H3RN in any place where the ambient temperature is more than 50°C, supply 90% to 110% of the rated voltages (at 12 VDC: 95% to 110%).


Do not leave the H3RN in time-up condition (i.e., with the internal relay in an ON state) for a long period of time (for example, more than one month in any place where the ambient temperature is high), otherwise the internal parts may become damaged. Therefore, the use of the H3RN with a relay as shown in the following circuit diagram is recommended.

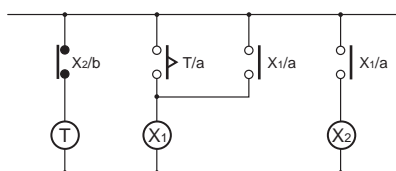


⊗ : Auxiliary relay such as G2R Relay

The H3RN must be disconnected from the socket when setting the DIP switch, otherwise the user may touch a terminal imposed with a high voltage and get an electric shock.

Do not connect the H3RN as shown in the following circuit diagram on the right hand side, otherwise the H3RN's internal contacts different from each other in polarity may become short-circuited.

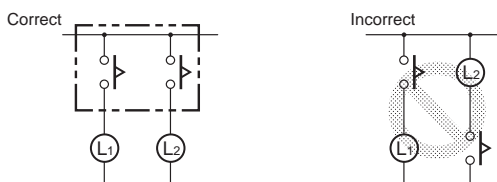


Use the following safety circuit when building a self-holding circuit with the H3RN and an auxiliary relay, such as a G2R Relay, in combination.

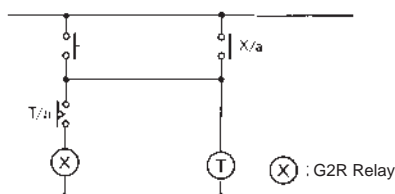

In the case of the above circuit, the H3RN will be in pulse operation. Therefore, if the circuit shown on page 3 is used, no auxiliary relay will be required.

Do not use the SPDT contact in a circuit which may cause short-circuiting at three points (otherwise, short-circuiting of the power supply may occur) because the SPDT contact of H3RN-1/-11 is composed of an SPST-NC contact.

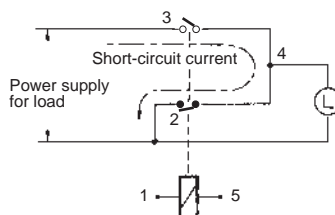

Do not set to the minimum setting in the flicker modes, otherwise the contact may be damaged.

Do not use the H3RN in places where there is excessive dust, corrosive gas, or direct sunlight.

Make sure that there is a space of 3 mm or more between any H3RN Models next to each other. (When using the P2RF-□-E Socket, a space of 3 mm or more will be secured.) If a space of 3 mm or more is not secured, the ambient temperature must be less than 50°C.

The internal parts may become damaged if a supply voltage other than the rated ones is imposed on the H3RN.

### Precautions for EN61812-1 Conformance

The H3RN as a built-in timer conforms to EN61812-1 provided that the following conditions are satisfied.

#### Handling

Do not touch the DIP switch while power is supplied to the H3RN.

Before dismantling the H3RN from the socket, make sure that no voltage is imposed on any terminal of the H3RN.

#### Wiring

Basic insulation is ensured between the H3RN's operating circuit and control output.

Basic insulation: Overvoltage category III, pollution degree 2 (with a clearance of 3.0 mm and a creepage distance of 3.0 mm at 240 VAC)

The clearance from the edge of the P2R-087P Socket to internal, current-carrying metal parts is 1.3 mm. Position the H3RN to provide the necessary clearance for the voltage used.

When using the P2RF-□-E or P2R-057P Socket, basic insulation is ensured in the mounted condition for a voltage of 250 VAC max.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.



## Terms and Conditions Agreement

### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

### Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

### Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.